


KEY BENEFITS

- Lowest Stem Friction for Inconel Reinforced Packing with no PTFE
- No PTFE blocking agents or Binders
- Great for Higher Pressure and Temperature Steam Service
- Perfect End Ring Material for Field Sets



SPECIFICATIONS

Standard Material Applications	Premium Flexible Graphite Braided Packing reinforced with Inconel wire knit without PTFE Rising and rotating valves in high temperature service where PTFE is not allowed to be used as a blocking agent
Available Sizes	1/8" to 1" Cross Sections
Pressure Limit	5,000 PSI
Temp Limit	1200F Steam, 850F oxidizing environment
Chemical Resistance	pH (0-14), except strong oxidizers

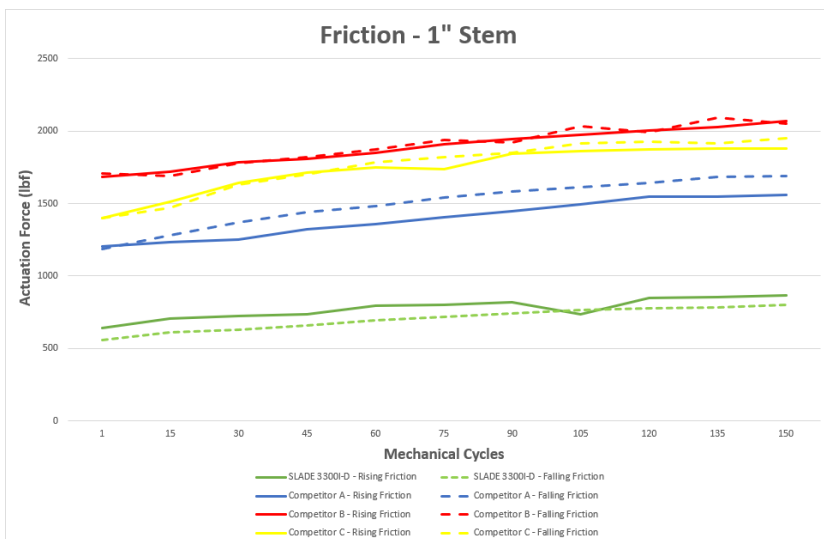

Visit <https://egcgraphite.com/valve-packing-systems> for more information.